


# **ROX**

Electronics, Inc.

## **HTX7025 25 & 70 Volt Speaker Transformer**

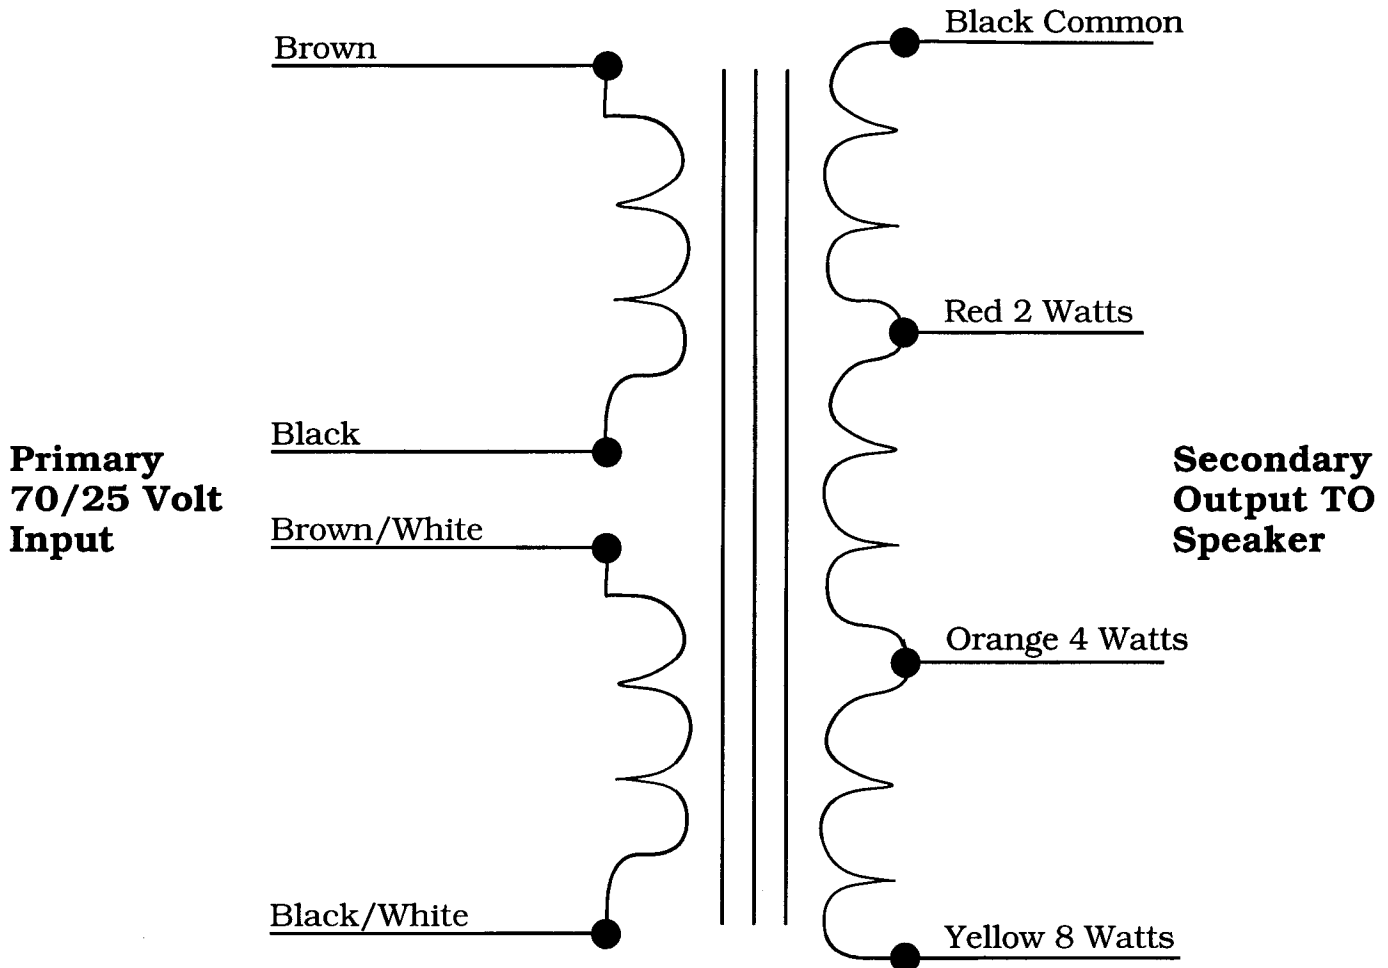

For **25 Volt** operation connect **Brown and Brown w/White Stripe** together for positive and connect **Black and Black w/White Stripe** together for negative

For **70 Volt** operation connect **Black and Brown w/White Stripe** together and use **Brown** for positive and **Black w/White Stripe** for negative

Connect **Speaker** to **Black** for **negative** and select **Red** (2 Watts) or **Orange** (4 Watts) or **Yellow** (8 Watts) for positive